
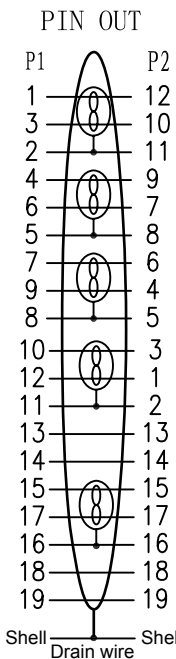
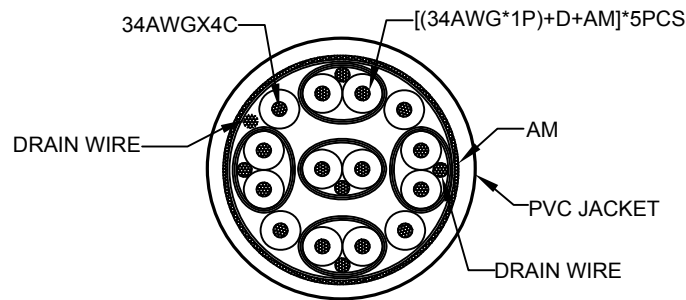


FILE AMEND NOTE	DATE	REV.
ORIGINAL EDITION	DEC 04 2019	B/0
CHANGING BRAID TO DRAIN WIRE	FEB 13 2025	B/1

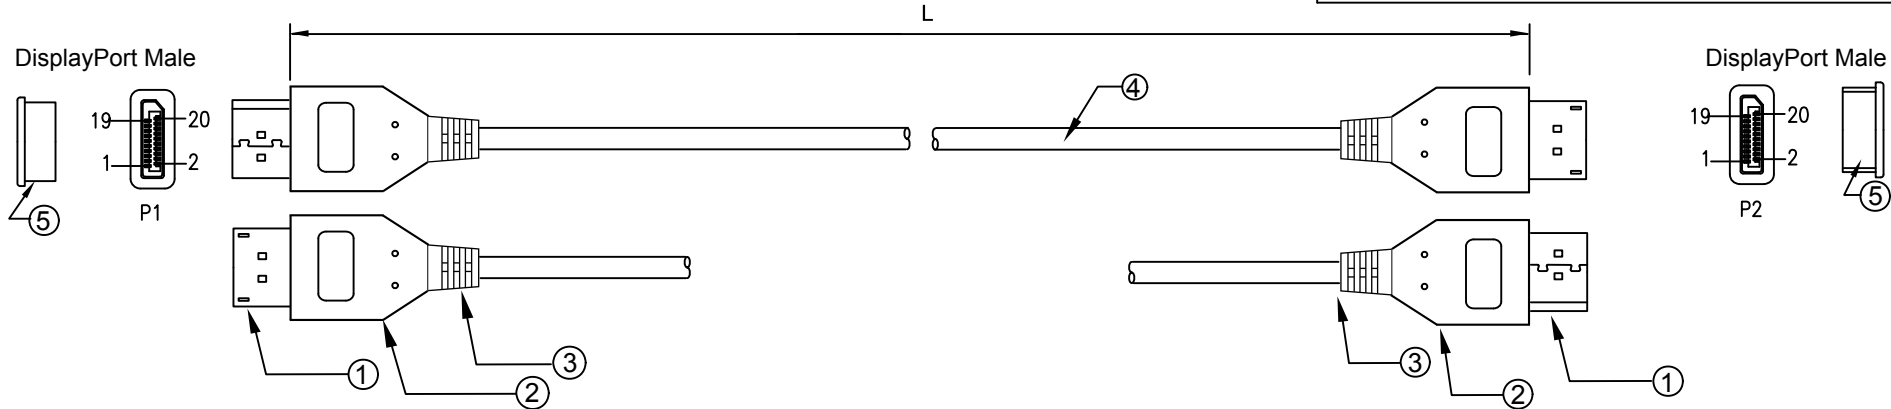

NOTE:

1. Electrical properties:

Printing: High Speed Cable 20276 80°C 30V VW-1

- 1.1 Tested by quantum data 980 handhold test
Instrument for DP1.4(32.4G)
Support 7680*4320 30Hz 4:4:4
Support 7680*4320 60Hz 4:2:0 or DSC

- 1.2 Tested by PC,3840*2160 120Hz 4:4:4 8bit HDR OFF
Tested by PC,3840*2160 120Hz 4:2:2 12bit HDR ON
Tested by PC,3840*2160 60Hz 4:4:4 12bit HDR ON
Tested by PC,720P,1080P

2. RoHS2.0(2011/65/EU) AND (2015/863/EU) WITH REACH COMPLIANT

MODEL LIST

Model	Length	DSP
11.04.5960	1000mm	4K120Hz 4:4:4 8bit
11.04.5961	1500mm	4K120Hz 4:4:4 8bit

MATERIAL LIST

No.	PART NAME	DESCRIPTION	QTY
⑤	DUST COVER	PE, COLOR: TRANSPARENT	2
④	CABLE	(1/0.160T*1P+1C+AL+MY)*5C+1/0.160T*4C+D+AL+PVC OD:3.8±0.1MM COLOR:BLACK	L
③	OUTER MOLD	BLACK PVC	2
②	OUTER MOLD	BLACK PVC	2
①	CONNECTOR	DP1.4 MALE ,RUBBER CORE:RED,GOLD PLATED PIN,GOLD PLATED SHELL	2

NAME	ROLINE DisplayPort Cable, v1.4, DP-DP, M/M, Slim, black
Item No.	11.04.5960/11.04.5961

SECOMP

MAPE	TOLERANCE	
	X.	±1.00
	X.X	±0.50
DRAW BY	SCALE	MM
	PAGE	1/1