


PIN OUT

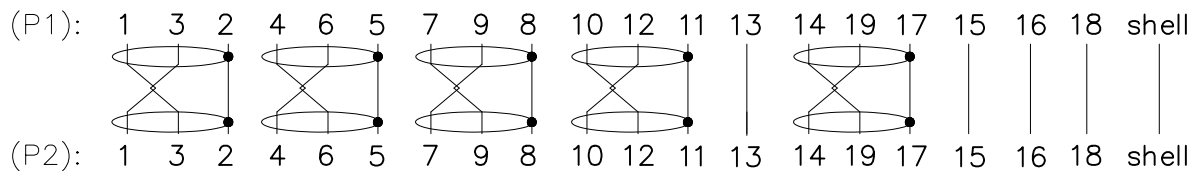

NOTE:

- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance:DC 300V 10M ohm min;
 - Contact resistance:3 ohm max;
 - Displayport practical application Test Pass 8k*4k@60HZ
- Feature:
 - 48Gbps bandwidth
 - 7680×4320@60Hz ,4096*2160@60hz resolution
 - Supports 3D/HDCP2.2/EDID/HDR/ARC/CEC/EMI/8PCM/Dolby Digital/DTS/MPEG/DVD-Audio/SACD/Dolby Digital Plus/True HD/dts-HD
- RoHS and Reach Compliant
- Cable marking: High Speed HDMI™ Cable With Ethernet RECYCLED
- Operating Temperature:-10℃~60℃
Storage Temperature:-20℃~80℃
- The proportion for the recycled material is more than 50%.

MATERIAL LIST:

④	Outer mold	Black RECYCLED PVC	2	
③	Inner mold	LDPE	2	
②	HDMI A/M	19P A/M,Black insulation The Pin Gold Plating,the shell for Gold Plating	2	
①	Cable	(30AWG BC*1P+D)*5P+30AWG BC*4C+AL-Foil+D+BRAID RECYCLED PVC JACKET OD6.3±0.2MM	L±T	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2023-12-19	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

11.45.5903	Ultra HDMI + Ethernet Cable, M/M, 8K60, 3m	3000±50
11.45.5902	Ultra HDMI + Ethernet Cable, M/M, 8K60, 2m	2000±30
11.45.5901	Ultra HDMI + Ethernet Cable, M/M, 8K60, 1m	1000±20
ITEM NO.	DESC.	LENGTH (mm)

SECOMP