





SBH300-12 (12V307W)

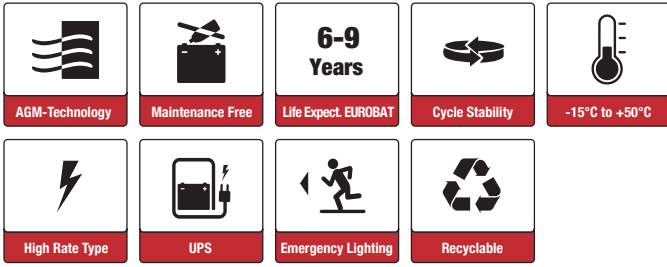

Applications

- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Emergency light
- Railway signal
- Alarm and security system
- Communication power supply
- DC power supply

Certificates



Specifications


Nominal Voltage	12V	Operating Temp. Range	Discharge: -20~50°C
Nominal Capacity	8.5Ah (C ₁₀ , 9.6V) 9.0Ah (C ₂₀ , 9.6V)		Charge: -10~50°C
Approx. Weight	2.45kg		Storage: -20~50°C
Terminal	T2	Cycle Use	Initial Charging Current less than 2.7A.
Container Material	ABS UL94 HB		Voltage 14.7V +0.1V at 20°C.
Nominal Power	5 min 444.96W	Standby Use	Temperature Coefficient -30mV/°C.
(20°C / 9.6V/Block)	10 min 306.96W		No limit on Initial Charging Current.
	15 min 228.60W		Voltage 13.7V +0.1V at 20°C.
Nominal Power	5 min 74.16W	Capacity affected by Temp.	Temperature Coefficient -20mV/°C.
(20°C / 1.6V/Cell)	10 min 51.16W	40°C 103%	
	15 min 38.10W	25°C 100%	
Max. Discharge Current	90A (5s)	0°C 86%	
Internal Resistance / Impedance (1kHz)	Approx. 22mΩ	Self Discharge	SSB batteries may be stored for up to 6 months at 20°C and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Nominal Oper. Temp. R.	20±3°C	Life Expectancy	6-9 years according to EUROBAT



Dimensions

■ T2 Terminal

Unit: mm | Dimensions: 151 Length X 65 Width X 94 Height (100 Height incl. Terminal)

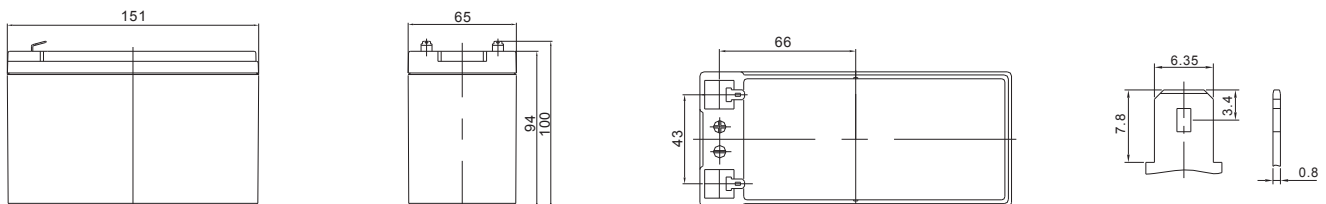


Constant Current Discharge (Amperes) at 20°C

F.V/Time	3min	5min	8min	10min	15min	20min	30min	60min	90min
9.6V	46.94	41.26	32.97	28.26	20.85	16.39	11.68	6.548	4.642
10.0V	42.60	37.44	30.15	26.05	19.50	15.47	11.06	6.241	4.443
10.2V	40.76	35.83	28.95	25.11	18.90	15.06	10.79	6.105	4.360
10.5V	37.75	33.19	26.97	23.53	17.85	14.30	10.34	5.900	4.228
10.8V	34.58	30.40	24.93	21.95	16.95	13.63	9.889	5.679	4.078
11.1V	29.57	25.99	21.24	18.63	14.54	11.84	8.745	5.133	3.730


Constant Power Discharge (Watts/cell) at 20°C

F.V/Time	3min	5min	8min	10min	15min	20min	30min	60min	90min
9.6V	506.16	444.96	356.76	306.96	228.60	181.02	129.48	73.68	52.72
10.0V	465.06	408.78	330.66	287.04	216.00	172.74	124.68	70.92	50.93
10.2V	449.04	394.74	320.04	278.52	211.50	169.08	121.74	69.78	50.14
10.5V	420.00	369.18	301.50	264.30	201.60	162.66	117.90	67.86	48.84
10.8V	389.88	342.72	282.06	249.18	192.60	156.24	114.00	65.88	47.55
11.1V	338.76	297.78	243.72	214.08	167.40	136.92	101.46	59.958	43.67


Discharge Characteristics

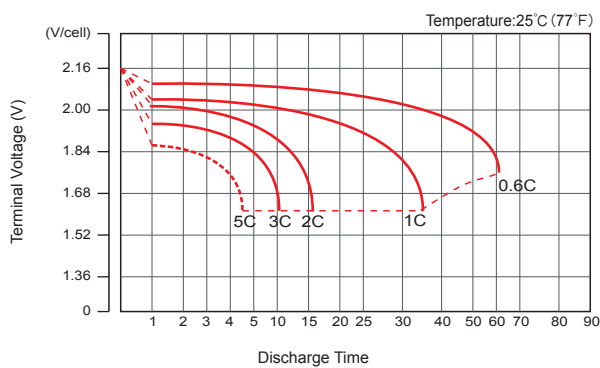

Float Charging Characteristics

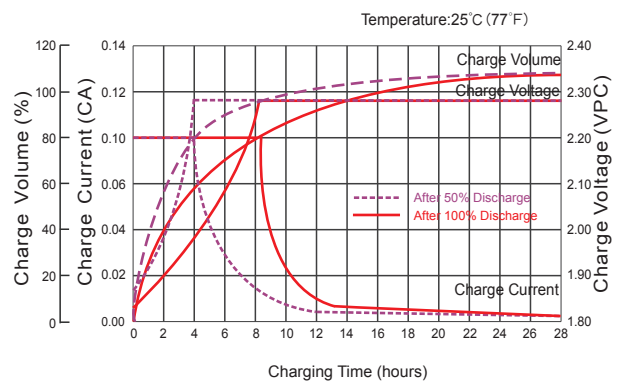

Temperature Effects in Relation to Battery Capacity

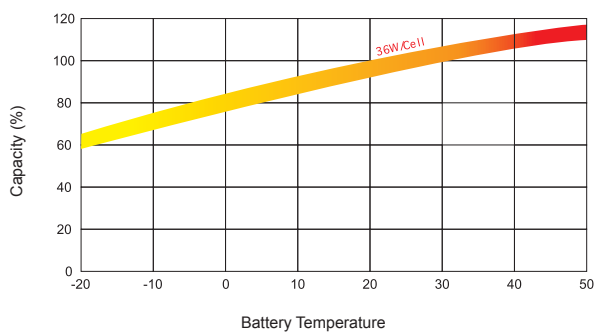

Effect of Temperature on Long Term Float Life

