




Datenblatt - Fiche technique - Data sheet


**21.15.2521**

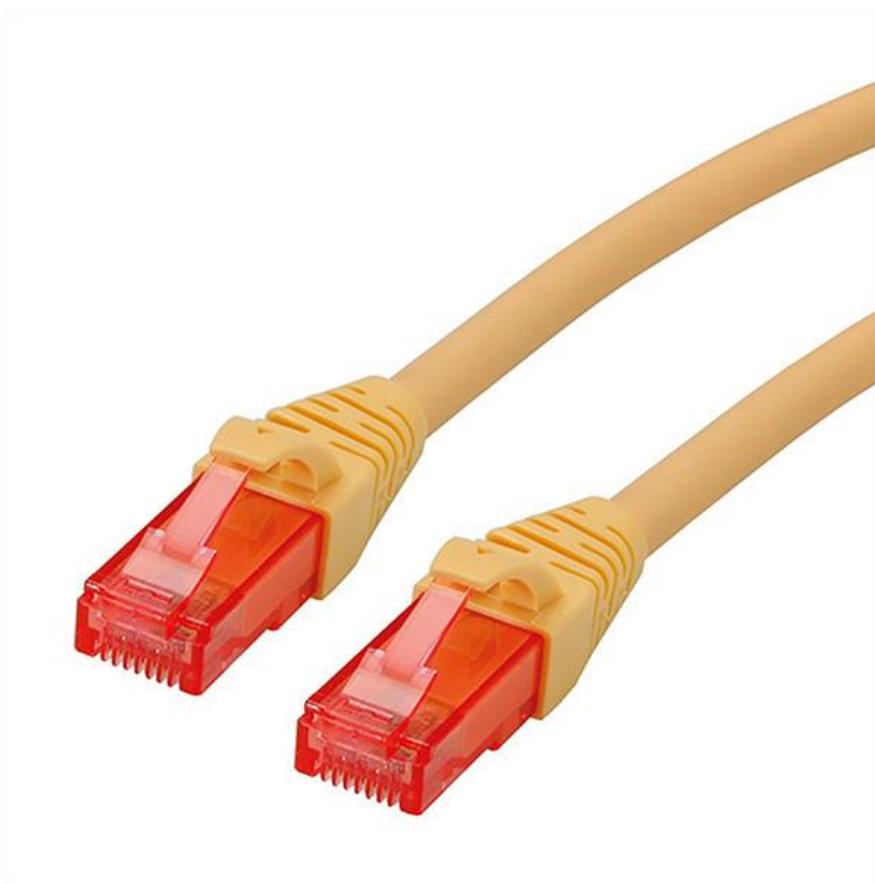

ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, gelb, 1,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, jaune, 1,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, yellow, 1.0 m

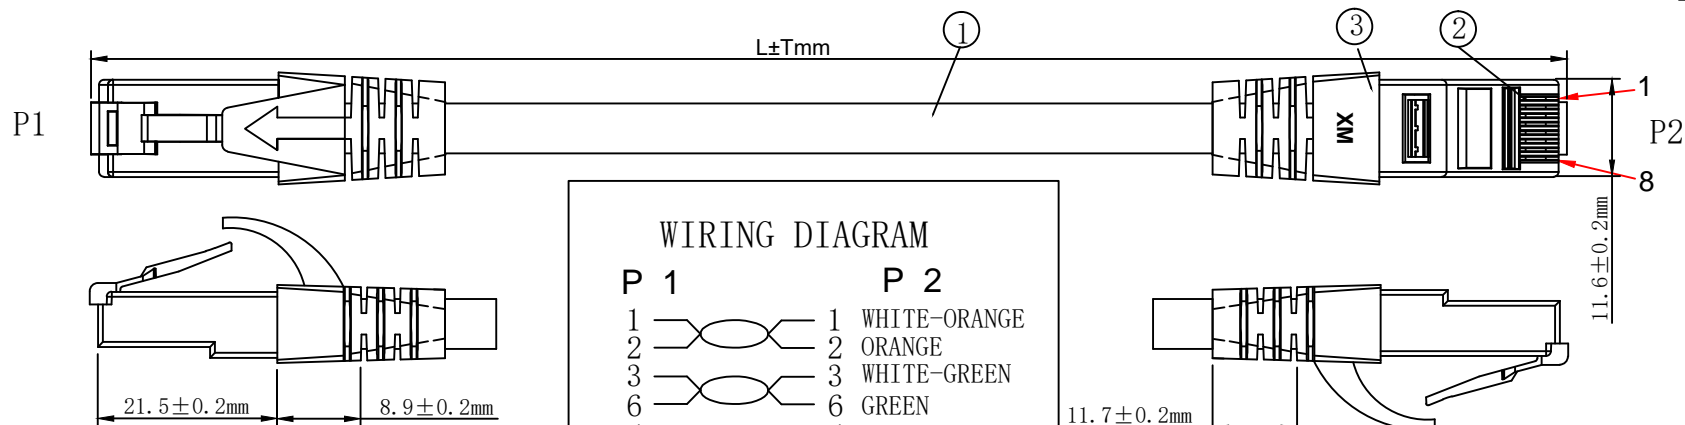

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius:50mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC yellow	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:yellow (PANTONE:135C)		
ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2942	300mm	±10mm
21. 15. 2520	500mm	±15mm
21. 15. 2521	1000mm	±30mm
21. 15. 2524	1500mm	±45mm
21. 15. 2522	2000mm	±60mm
21. 15. 2523	3000mm	±90mm
21. 15. 2525	5000mm	±150mm
21. 15. 2526	7500mm	±210mm
21. 15. 2527	10000mm	±300mm
21. 15. 2528	15000mm	±450mm
21. 15. 2529	20000mm	±600mm

ITEM NO.	21. 15. 2942	21. 15. 2520	21. 15. 2521	21. 15. 2522	21. 15. 2523
21. 15. 2524	21. 15. 2525	21. 15. 2526	21. 15. 2527	21. 15. 2528	21. 15. 2529
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, yellow				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-10-20	A

SECOMP