
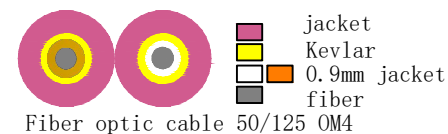


Note:

1. ROHS 2.0 & REACH Compliant
2. The out jacket is conform to IEC60332-1, EN60754-2, EN 61034-2
3. Min. Bending Radius: Static:30mm, Dynamic:60mm

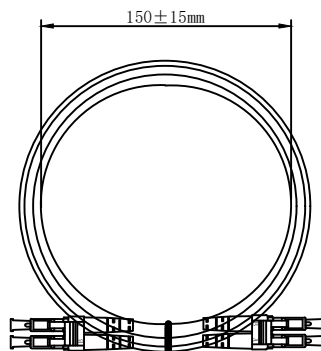

TYPE	MULTI-MODE
Insertion Loss	≤0.3dB
Return Loss	≥30dB
Test Wavelength	850nm

ITEM NO.	DESC.
21.99.8750	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/LC, Erika violet, 0.5m
21.99.8751	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/LC, Erika violet, 1m
21.99.8752	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/LC, Erika violet, 2m
21.99.8753	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/LC, Erika violet, 3m
21.99.8755	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/LC, Erika violet, 5m
21.99.8754	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/LC, Erika violet, 7m
21.99.8758	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/LC, Erika violet, 10m
21.99.8756	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/LC, Erika violet, 15m
21.99.8757	VALUE OM4 FIBER OPTICAL CABLE 50/125um, LC/LC, Erika violet, 20m

⑧	Ring 1 2	4pcs	
⑦	Black Heat Shrink Tube	2pcs	
⑥	LC MM Erika violet Clip	2pcs	
⑤	LC Dust Cap White	4pcs	
④	LC Erika violet Duplex Connector	4pcs	
③	LC White Boot	4pcs	
②	LC/UPC MM Ferrule 126-128um	4pcs	
①	Fiber Optical Cable Duplex ϕ 3.0mm OM4 50/125um Erika violet RAL4003 LSZH	L+0.1m	
NO.	SPECIFICATION STANDARD	QT'Y	REMARK
	Add Min. Bending Radius	2022-1-24	A1
	NEW	2021-07-9	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE REV.

SECOMP