


21500-046 EUROPACPRO 19" SUBRACK KIT FOR RAILWAY, SHIELDED, SNCF, COMPACTPCI, 6 U, 84 HP, 320 MM

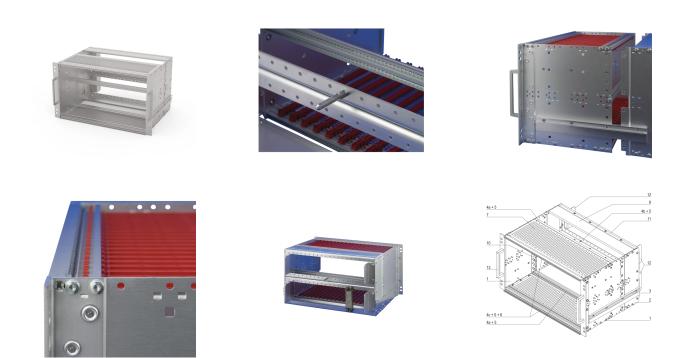

KEY FEATURES

SNCF listed, EuropacPRO-fer, tested to NF F 61-005 and NF F 60-002

The 19" bracket is firmly fixed to the side panel (tox-cold welded) and is especially suited for high mechanical stresses (vibration resistance)

Lateral support bars to NFF standard facilitate insertion of subrack into the (cabinet) frame. The double 19" screwing position adds to additionally safety (NFF standard)

IP 20, in accordance with IEC 60529

EMC of approximately 40 dB at 1 GHz, 30 dB at 2 GHz, assuming that the front is covered with shielded front panels, testing in accordance with VG 95373 part 15

Aluminum construction

Modifications such as cutouts, different finishes or dimensions available

Supplied as space-saving flat-pack

PRODUCT ATTRIBUTES

Product Type: Subrack/Chassis
Rack Height: 6 U
Rack Width: 84 HP
Depth: 320 mm
For Mounting: Backplane
Board Depth: 160 mm
EMC Shielding: Yes
EMC Gasket Type: Textile
Static Load: 15 kg
Shock and Vibration Tolerance: 5 g (force)
Handle Included: Yes
Mounting: Rack
Complies With: IEC 60297-3-103; IEEE 1101.10; SNCF NFF 61005; SNCF NFF 60002
Package Quantity: 1

ADDITIONAL PRODUCT DETAILS

Subrack for Railway applications, conform to SNCF Standard, shielded version for CompacPCI applications.

Fer-=-ferroviaire-=-French Railways, 1-T = 4-HP = 20.32-mm Receptacle/mounting frame for subracks, stainless steel, 9-T or 21 T on request.

Version 9 T available on request; Test reports available online.

Guide rails color according to IEEE 1101.10 red = space for CPU-board; grey = space for peripheral boards; green = space for CompactPCI; 19"-power supplies 0,1" offset.

Individual configuration: broad range of variants in height, width and depth; guide rails for a wide variety of applications; interior options; accessories and mounting material.

CERTIFICATIONS





North America

All locations +1.763.422.2661 Chat with us: schroff.nvent.com

Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: schroff.nvent.com

Asia

Shanghai, China +86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: schroff.nvent.com

nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: schroff.nvent.com



© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

Our powerful portfolio of brands:

nVent reserves the right to change specifications without notice.