


MOLDING:
YUS-59



DATE	REV.	REVISION	DRAFTING	CHECKED
2024. 01. 26	A/0	NEW	LMF	
2024. 06. 21	A/1	△ Add NEW CUST' R P/N and Cable Color	LMF	

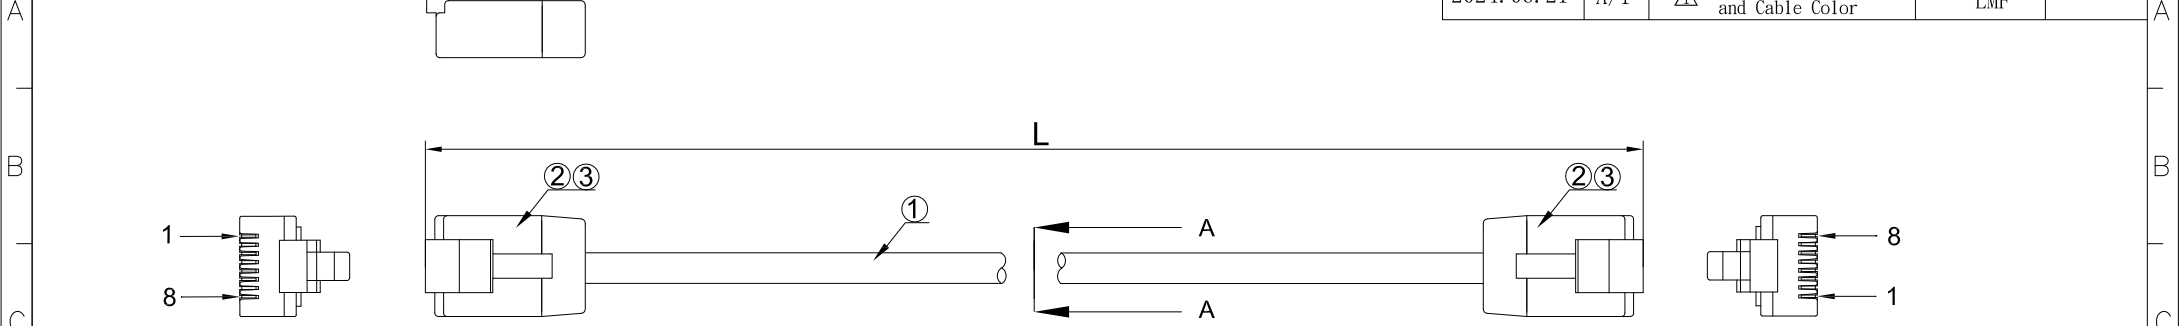

Marking:CAT.6A U/FTP PATCH CABLE 32AWGx4P LSZH

P1

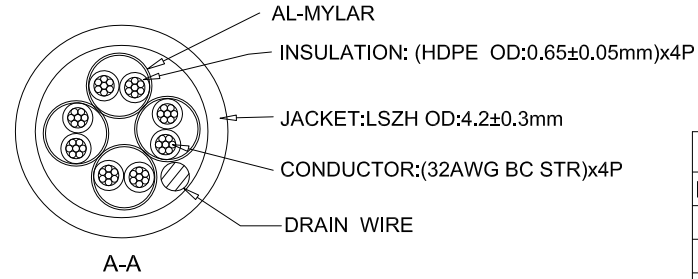


P2



PINOUT			
P1(T568B)		P2(T568B)	WIRE
1		1	WHITE/ORANGE
2		2	ORANGE
3		3	WHITE/GREEN
6		6	GREEN
4		4	BLUE
5		5	WHITE/BLUE
7		7	WHITE/BROWN
8		8	BROWN
Shield		Shield	BRAID

- Note:
- 1.Channel+PoE Test
 - 2.100% Test(Open,short,miswire)
 - 3.Conductor Resistance:4 Ω max.
 - 4.Insulation Resistance:DC/250V,10MΩ MIN,0.01S
 - 5.Hi-pot Test:AC/250V 5mA Max. For 0.01s
 - 6.All Material meet the RoHS 2.0 and Reach
 - 7.Minimum bending radius:25mm

SECOMP

③	Molding	70P PVC BU608	2PCS	Unless specified on the drawing, tolerances are per the follows: X. ±0.20 X* ±3 .X ±0.10 .X* ±0.3 .XX ±0.05	DRAW. NO	GFWC-S240031	TITLE	ROLINE PatchCord U/FTP, Cat.6A, AWG32, LSOH, Ultra Short Connector				
②	Plug	RJ45 8P8C 50u" Shielded Hole Diameter OD:0.7mm	A/R		CUST' R P/N	--	DRAW	LMF	DATE	2024. 06. 21		
①	Cable	LAN CABLE CAT.6A U/FTP 32AWGx4P STR BC LSZH	A/R		SCALE	NONE	CHECK					
NO.	TITLE	DESCRIPTION		Q'TY	UNIT	mm	APPROVED					
Cable Spec NO.	GFWL-C230221	Part Number	--	Note	<input checked="" type="checkbox"/> RoHS2.0 <input checked="" type="checkbox"/> Reach <input type="checkbox"/> GP <input type="checkbox"/> HF <input type="checkbox"/> Other						SHEET	1 OF 2

DATE	REV.	REVISION	DRAFTING	CHECKED
2024.01.26	A/0	NEW	LMF	
2024.06.21	A/1	△ Add NEW CUST' R P/N and Cable Color	LMF	



PID	Cable Color	Molding Color	Length(mm)
21.15.4500	Grey	Grey	500±20
21.15.4560	Black	Black	
21.15.4570	White	White	
21.15.4501	Grey	Grey	1000±30
21.15.4561	Black	Black	
21.15.4571	White	White	
21.15.4504	Grey	Grey	1500±30
21.15.4564	Black	Black	
21.15.4574	White	White	
21.15.4502	Grey	Grey	2000±30
21.15.4562	Black	Black	
21.15.4572	White	White	
21.15.4503	Grey	Grey	3000±30
21.15.4563	Black	Black	
21.15.4573	White	White	
21.15.4505	Grey	Grey	5000±50
21.15.4565	Black	Black	
21.15.4575	White	White	

SECOMP

Unless specified on the drawing, tolerances are per the follows:

X. ±0.3 X° ±3
 .X ±0.15 .X° ±0.3
 .XX ±0.10

DRAW. NO	GFWC-S240031	TITLE	ROLINE PatchCord U/FTP, Cat.6A, AWG32, LSOH, Ultra Short Connector			
CUST' R P/N	--	DRAW	LMF	DATE	2024.06.21	
SCALE	NONE	CHECK		DATE		
UNIT	mm	APPROVED		SHEET	2 OF 2	

Cable Spec NO.	GFWL-C230221	Part Number	--	Note	<input checked="" type="checkbox"/> RoHS 2.0	<input checked="" type="checkbox"/> Reach	<input type="checkbox"/> GP	<input type="checkbox"/> HF	<input type="checkbox"/> Other
----------------	--------------	-------------	----	------	--	---	-----------------------------	-----------------------------	--------------------------------

