





# 30848-472 PLUG-IN UNIT U-PROFILE FRONT PANEL FOR HANDLE FORM 1, 6 U, 8 HP, 2.5 MM, AL, FRONT ANODIZED, REAR CONDUCTIVE







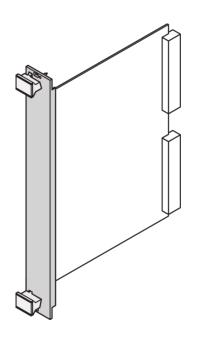

# **KEY FEATURES**

Al profile, front anodized, rear conductive

Front panel, U-profile, shieldable

Alignment pin pressed-in, stainless steel

# **PRODUCT ATTRIBUTES**

Type: Front Panel with Handle (PIU)

Accessory Type: Front panel

Handle Type: Trapezoid, Type 1

Mounting: Screw-on Front

EMC Shielding: No (Retrofittable)

EMC Gasket Type: Textile

Material: Aluminum

Front Finish: Anodized

Rear Finish: Conductive

Treated Edges: No

Rack Height: 6 U

Rack Width: 8 HP

Height: 261.8 mm

Width: 40.3 mm

Depth: 2.5 mm

Complies With: IEC 60297-3-101; IEEE 1101.1/11

Package Quantity: 5

# ADDITIONAL PRODUCT DETAILS

U-profile front panel. Enables the assembly of form 1 trapezoid form extraction handle. The front panel can be shielded with a textile gasket.

Please order EMC profile seal separately.

Please take into consideration that deliveries may be carried out in the stated SPQs (SPQ, e.g. 5 pieces, 10 pieces, 50 pieces, etc.). Differing order quantities (e.g. 2 pieces) may be changed to the next possible delivery quantity = Standard Pack Quantity.

## **CERTIFICATIONS**



## **North America**

All locations +1.763.422.2661 Chat with us: schroff.nyent.com

## Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: schroff.nvent.com

## Asia

Shanghai, China +86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: schroff.nvent.com

## Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: schroff.nvent.com



Our powerful portfolio of brands:

**nVent.com** CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.